

Technical data sheet

Type V2500

Garden tap with nozzle

Applications and general features



- For garden tap for drinking water.

Technical description


DN	PFA	References
" mm	bar	
1/2 15	10	149B 5325
3/4 20	10	149B 5326
1 25	10	149B 5327

- **Connection** : Male/male, BSPP threaded.
- **Permissible operating pressure PFA - water-** (for supply, distribution and disposal of water) : See table
- **θ** : Mini. 0 °C
Maxi. 50 °C
- **Mediums** : Drinking water
- **Approval** : ACS
- **International construction Standards** : Thread connection according to EN ISO 228-1

Overall dimensions

DN	A	B	C	Weight
"	mm	mm	mm	kg
1/2	95	31	45	0,188
3/4	95	35	47	0,256
1	95	45	48	0,378

Désignation	Matériaux
BODY-NOZZLE	Brass
BALL	Brass
SEAT SEAL	NBR
SEALING GLAND	PTFE

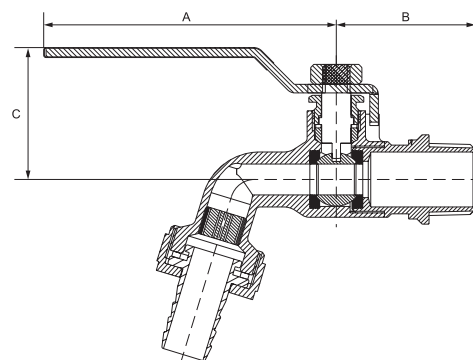

Socla can accept no responsibility for possible errors in catalogue, brochures and other printed material. Socla reserve the right to alter its products without notice. This also applies to products already agreed. All trademarks in this material are the property of the respective companies. All right reserved.

Socla SAS

365 rue du lieutenant Putier
71530 VIREY LE GRAND
Postal address : BP 10273
71107 CHALON SUR SAONE Cedex

Tel : 33 3 85 97 42 52
Fax : 33 3 85 97 97 42
<http://www.socla.com>
e-mail : contact@socla.com